

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/020893 A1

(51) International Patent Classification⁷:
55/162, 55/163, 55/1645, 55/18, 58/10

F16L 55/16,

(74) Agent: WRAY & ASSOCIATES; Level 4, The Quadrant,
1 William Street, Perth, Western Australia 6000 (AU).

(21) International Application Number:
PCT/AU2003/001131

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:
2 September 2003 (02.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002951397 2 September 2002 (02.09.2002) AU
2003902374 16 May 2003 (16.05.2003) AU

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): SHIELD-
LINER CO LIMITED [AU/AU]; 152 Vulcan Road, Can-
ning Vale, Western Australia 6155 (AU).

Published:


— with international search report

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): GRAHAM, Neil,
Deryck, Bray [AU/AU]; 18 Castellon Crescent, Cockburn
Waters, Western Australia 6166 (AU).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR AND METHOD OF LINING CONDUITS

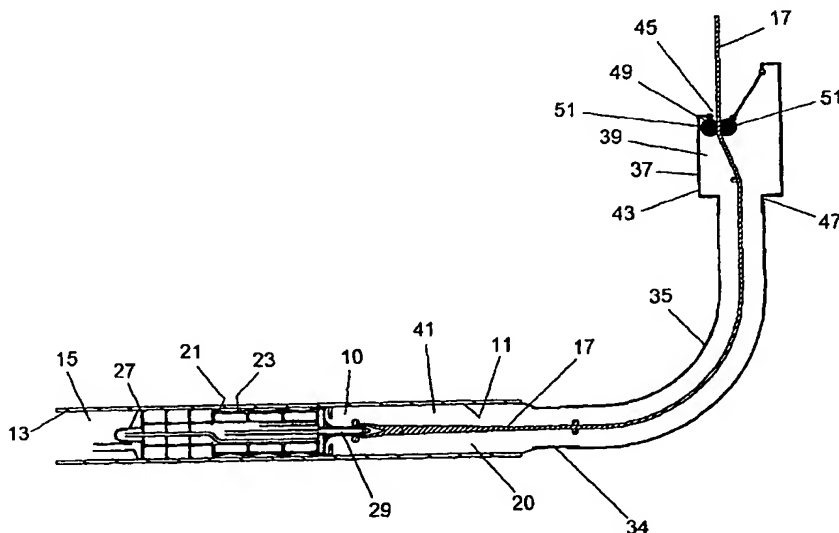

(57) Abstract: Apparatus (10) for lining an internal surface of a pipeline (15) or other conduit. The apparatus (10) comprises an installation head (21) which is progressively moved along the pipeline (15) for installing a flexible liner (11) onto the interior surface (13) of the pipeline (15). The flexible liner (11) comprises a tube structure (17) undergoing eversion within the pipeline (15). The tube structure (17) comprises a resin absorbent material. The installation head (21) has a contact surface (23) against which the tube structure (17) acts during eversion thereof, the contact surface (23) having means for delivery of a curable resin to the evverting portion of the tube. The installation head (21) advances along the pipeline (15) under the influence of a driving force comprising (at least in part) pressure applied to the installation head (21) through the evverting tube structure (17).

WO 2004/020893 A1